



**ESA**

*The pictures shown are for illustrative purposes only. For shape, material and color specifications refer to internal descriptions.*


**ACCESSIBILITY**

**Openable**  
Openable fixture with basic tools  
Replaceable internal components using basic tools.



81 mm  
3,2"

288 mm  
11,3"

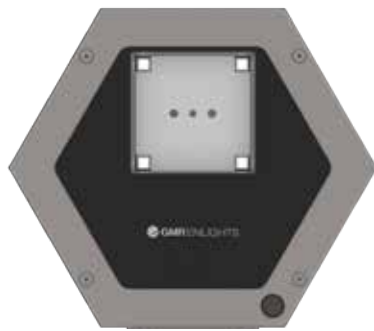

250 mm  
9,8"

Scale: 1:5

**Max. weight**

7,5 lb (3,4 Kg)

**EPA (CXS)**

Plan: 0,64ft<sup>2</sup> (0,06 m<sup>2</sup>)

**MODULE COMBINING**



EMC1A

445 mm  
17,5"



EMC2A

695 mm  
27,3"




EMC3A


945 mm  
37,2"

**FIXING TYPE**

**Side**  
Adjustable in 5° steps

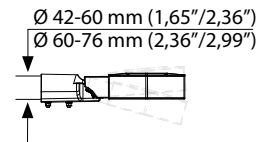

**Pole top**  
Adjustable in 5° steps

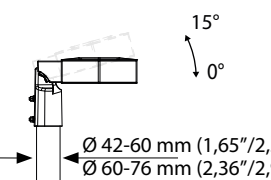

**STANDARD**

Compliance: UL Standard 1598-CSA C22,2no.250.0.


**CONFORMITY | PROTECTION**

**Conformity**



**Salt spray test**

ISO 9227



**Vibration test passed**

IEC 60068-2-6



**Safety classes**



Class I

**Protection classes**



**Photobiological safety**



Classe 0 Rischio esente IEC/TR62471

**PLUS**



CUT OFF



OPTICAL FLEXIBILITY



LOW GLARE



CAM 2017 COMPLIANT

**LIGHTING FIXTURE FEATURES**

**General features**

Power source:	120-277V   50/60Hz   tolerance +/-10%
Current supply:	350 mA   525 mA   700 mA   1050 mA (P <sub>max</sub> 127W)
Power Factor   THD:	≥0.95   <10 % (At full load)
Expected life (Ta=77°F 25°C):	> 100.000 h   L90B10   @ LED 700mA
Operational temperature (Ta):	T <sub>min</sub> = -40°F (-40°C)   T <sub>max</sub> = 131°F (55°C)   700 mA
Storage temperature:	-40°F/+176°F (-40°C/+80°C)
Standard functions:	Current fixed   Virtual midnight   CLO
Overcharge protection:	Main surge immunity up to 10kV

**Materials**

Lighting fixture:	Die cast aluminium   EN1706
Optical system:	Aluminium reflector, 99.7% oxidised and polished purity
Screen:	Screen-printed ultraclear tempered glass   Th. 0,15in (4mm)
Gaskets:	Removable silicon
Cable gland:	Polyamide PA66   PG16   Ø 0,55in (14mm) MAX
Screws and bolts:	AISI 304 stainless steel
Fixture color:	GMR light

**LED FEATURES**


LED data 4.000 K - 700mA:	340 lm/LED   180 lm/W   77°F (25°C) [Tj]   ≤ 3 step MacAdam
Color temperature:	3.000 K   4.000 K   CRI ≥ 70

**OPTIONAL**


Additional surge protector device:	SPD   Max peak current 10kV 8/20µs
Additional surge protector device SPD 400:	SPD   Max peak current 10kV 8/20µs + permanent overvoltage protection higher than 270Vac
Optional functions:	DALI-DALI2
Connectors and sockets:	ZS (Lumawise Zhaga Socket)

ASYMMETRICAL DISTRIBUTION \\\


R2A

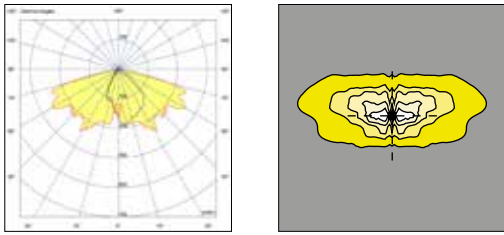


R2B

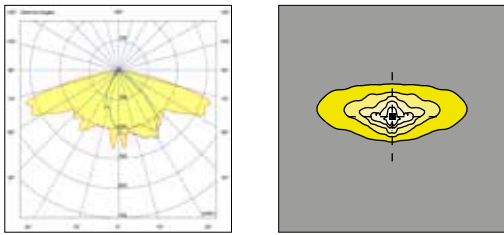


R3A

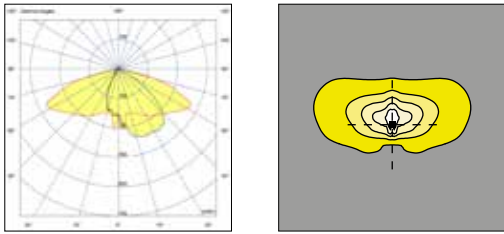

R3B

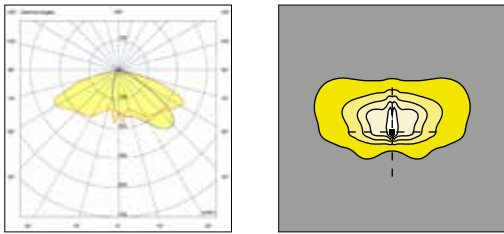

R3C

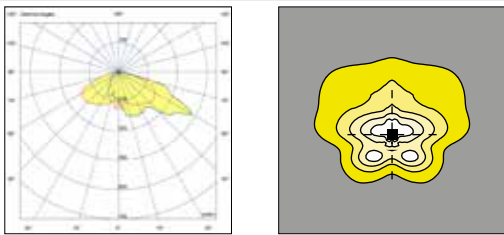

R2B



R3A




The LED modules nominal data refers only to the LED light sources in a standard version, with 4000 K color temperature, color rendering index CRI 70 min. and a junction temperature  $t_j$  of 77°F (25°C). The LED nominal data are extrapolated from the manufacturer documentations.

The lighting fixture measured data refers to GMR ENLIGHTS products in a standard version, with 4000 K color temperature, optica type R3B and an ambient temperature  $t_a$  of 77°F (25°C).




**GMR ENLIGHTS offers the possibility of driving the device with custom currents (•).**

To obtain luminous fluxes and efficiencies of the lighting fixture in case of color temperature and/or color rendering index different from the standard use the conversion factors shown in the tables.

**LED modules nominal data (4000 K | CRI 70 min. |  $t_j=77^\circ\text{F}$  |  $25^\circ\text{C}$ )**

LED code		I [mA]	Luminous flux [lm]	LED power [W]	Efficiency [lm/W]
RF03		350	2539	12,8	198
		525	3603	18,7	193
		700	4573	24,8	184
		1050	6247	38,3	163
RF06		350	5078	25,6	198
		525	7206	37,4	193
		700	9146	49,6	184
		1050	12494	76,6	163
RF09		350	7617	38,4	198
		525	10809	56,1	193
		700	13719	74,4	184
		1050	18741	114,9	163

**Lighting fixture measured data (4000 K | OPTIC R3A |  $t_a=77^\circ\text{F}$  |  $25^\circ\text{C}$ )**

Order code:EMC_RFxx		(•) I [mA]	Luminous flux [lm]	LED power [W]	Efficiency [lm/W]
RF03		350	2234	15	149
		525	3171	21,5	147
		700	4024	28,5	141
		1050	5497	42,5	129
RF06		350	4468	30	149
		525	6342	43	147
		700	8048	57	141
		1050	10994	85	129
RF09		350	6702	45	149
		525	9513	64,5	147
		700	12072	85,5	141
		1050	16491	127,5	129

**OPTIC CONVERSION FACTOR  
LUMINOUS FLUX**

Optic	Flux multiplier
R2A	0,99
R2B	0,98
R3B   R3C	1,00

**Tk CONVERSION FACTOR  
LUMINOUS FLUX**

Tk [K]	Flux multiplier
2.200 (*)	0,70
3.000	0,94
4.000	1,00

**CRI CONVERSION FACTOR  
LUMINOUS FLUX**

CRI (color render index)	Flux multiplier
70	1,00
80	0,93

### Standard functionality

#### Fixed current

During production, the light fixture is pre-set with a fixed current amongst the standard settings that appear in the tables on page 3. Upon customer's request, it is also possible to set a specific current (custom setting).

#### Virtual Midnight | Automatic dimming

The driver is programmed to automatically dim the light output according to the time. As required by regulations, the maximum output is set during initial hours and towards the end of the light fixture's operating time interval. During these hours there is statistically more traffic. The light output is then dimmed during the central hours of the operating time interval. This management is achievable through a self-learning process of the device, that establishes the centre point of the time interval. This moment is called "virtual midnight" and it is the point that the dimming profile refers to in order to know when to reduce the light output. We can manage up to 8hrs of programming that evolve around the virtual midnight and up to 5 steps of dimming. This way the light output will adjust automatically, adapting throughout the year to the duration of the nighttime, by referring to the pre-set parameters based on the centre point of the operating time interval.

#### CLO Constant Lumen Output

LEDs over time are inevitably subject to performance depreciation. This light reduction may be compensated by gradually increasing the LED's current during its lifespan, this corresponds to a gradual increase of lumen output proportional to the amount that is naturally depreciated.

### On request functionality

#### DALI - DALI2 Control and monitoring system

On request, the fixture can be fitted with a DALI2 communication interface. This protocol allows it to be monitored and controlled remotely through use of Dali control buses.


#### DALI SENSOR (D4i)

On request, the fixture can be equipped with a D4i certified power supply. This is the ideal solution for wireless sensors and/or controls. This system was developed to integrate various systems to address smart city requirements. Included is DALI2 protocol + auxiliary power (AUX) to supply power to devices and sensors. This system is usually required when using a Zhaga Lumawise socket.


### On request connectors and external sockets

#### ZHAGA Lumawise Zhaga Socket (4 PIN)

The Lumawise Zhaga socket is a small and compact 4 Pin connector/socket, that is fits ideally with the design of GMR ENLIGHTS fixtures. With ZHAGA Lumawise sockets it is possible install the devices, sensors, ZHAGA remote controls during or after installation of the light fixtures. This socket is usually required in conjunction with the DALI Sensor feature, which involves a DALI2/D4i communication protocol in addition to 12/24V auxiliary port to supply power to the sensors. It is compatible with point-to-point wireless control solutions and SMART CITY applications to control and monitor the public lighting infrastructure.

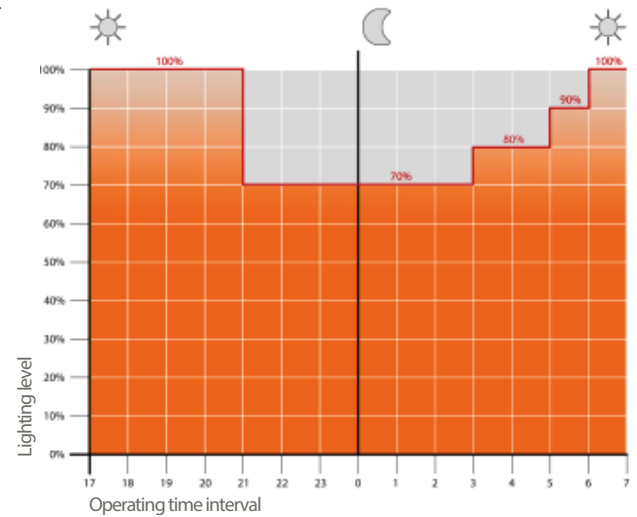

Example of 4-step adjustment with virtual midnight

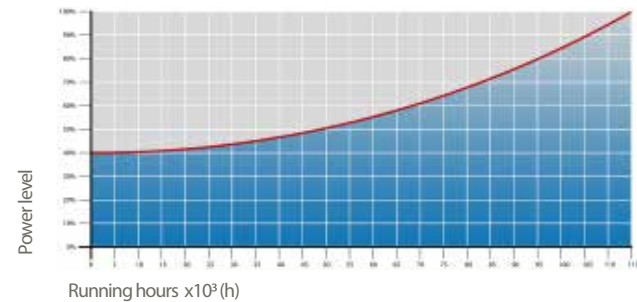

CLO Light Flow Compensation

#### 4 Pin Lumawise Zhaga Socket (C) and IP66 cap (D)



#### Installation example of Lumawise Zhaga



## Protection cycles

GMR ENLIGHTS works with cast iron, steel and aluminum. The materials are selected and processed to maximize performance and quality.

### GALVANIZED STEEL

#### Protection of galvanized steel surfaces for poles

The protection of galvanized steel elements is achieved by following steps:

- Micro sandblasting;
- First epoxy layer application followed by: Wilting > Drying > Cooling;
- Acrylic glaze layer application followed by: Wilting > Drying > Cooling;
- Packing at least after 24-hour-drying at room temperature.

#### Protection of galvanized steel surfaces for brackets and pastorals

The protection of the galvanized steel elements is achieved thanks to:

- Micro sandblasting;
- Phosphoric pickling bath at a ph level ranging from 1.5 to 3;
- Rinsing with demineralised water;
- First powder layer application;
- Kiln firing;
- Application of a final powder layer;
- Kiln roasting of the final powder layer at 356°F (180°C);
- Cooling.

### CAST IRON

#### Protection of cast iron surfaces for bases

The protection of cast iron elements is achieved by the following treatments:

- Surface micro shotblasting;
- Mono-component dip galvanizing followed by: Wilting > Drying > Cooling;
- Epoxy micaceous primer application followed by: Wilting > Drying > Cooling;
- Acrylic enamel application followed by: Wilting > Drying > Cooling;
- Packing at least after 24-hour-drying at room temperature.

### DIE-CAST ALUMINIUM

#### Protection of die-cast aluminium surfaces for lighting fixtures, tops, collars, brackets and pastorals

Lighting fixtures, brackets, pastoral, and die-cast accessories undergo a cycle of powder painting which creates a barrier against the corrosion of metal parts. Moreover this barrier makes the finished product comply with design specifications in terms of surface roughness, color and reflectance.

The cycle consists of the following steps:

- Micro sandblasting;
- Hot pickling bath in a zinc-based phosphodegreasing solution;
- Specific process for the preparation of surfaces before painting;
- Washing with water;
- Rinsing with demineralised water and subsequent drying;
- First powder layer application followed by kiln baking at 356°F (180°C);
- Final powder layer application using a High Durability product and final kiln roasting at 356°F (180°C).



#### Salt spray test

The top quality of such treatments is confirmed by salt spray tests performed in accordance with standard ISO 9227:2017 Neutral Salt Spray test (NSS).

The test was carried out for 8.000 hours at 95°F (35°C) and demonstrated through the report test released.



**GMR ENLIGHTS s.r.l.**

Legal headquarters:  
Strada Provinciale Specchia - Alessano, 68 • 73040 (LE)

Administrative and operational headquarters:  
Via Grande n°226 • 47032 Bertinoro (FC)

T +39 0543 462611  
F +39 0543 449111

[sales@gmrenlights.com](mailto:sales@gmrenlights.com)  
[www.gmrenlights.com](http://www.gmrenlights.com)